

HOW TO SETUP WIFI ON YOUR DOOR ACCESS CONTROL UNIT



This quick guide will show you how to setup WIFI on your Door Access Control unit!

WHAT YOU'LL NEED


A Monitor with HDMI Port



This will **NOT** work with:

- All in one computers
- Monitors that do not support HDMI
- Laptops
- Tablets

HDMI Cable

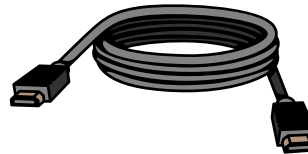

USB Mouse



Door Access Control (DAC)




HOW TO SETUP WIFI ON YOUR DOOR ACCESS CONTROL UNIT

1. Disconnect the Door Access Control unit from power (unmount it from the wall if need be).
2. Once the DAC is unplugged and powered off, plug the HDMI cable into the HDMI port on the DAC (*located on the opposite side of the RhinoFit Logo*).
3. Connect the monitor to power.
4. Connect the other end of the HDMI cable from the DAC to the monitor.
5. Connect the USB mouse to one of the USB ports on the DAC.
6. Plug the power back into the DAC and wait for it to load (if the monitor doesn't show anything, check the connections between the DAC and the HDMI Cable and the monitor until it shows the screen pictured below)




6. Once you get this screen click on the

HOW TO SETUP WIFI ON YOUR DOOR ACCESS CONTROL UNIT

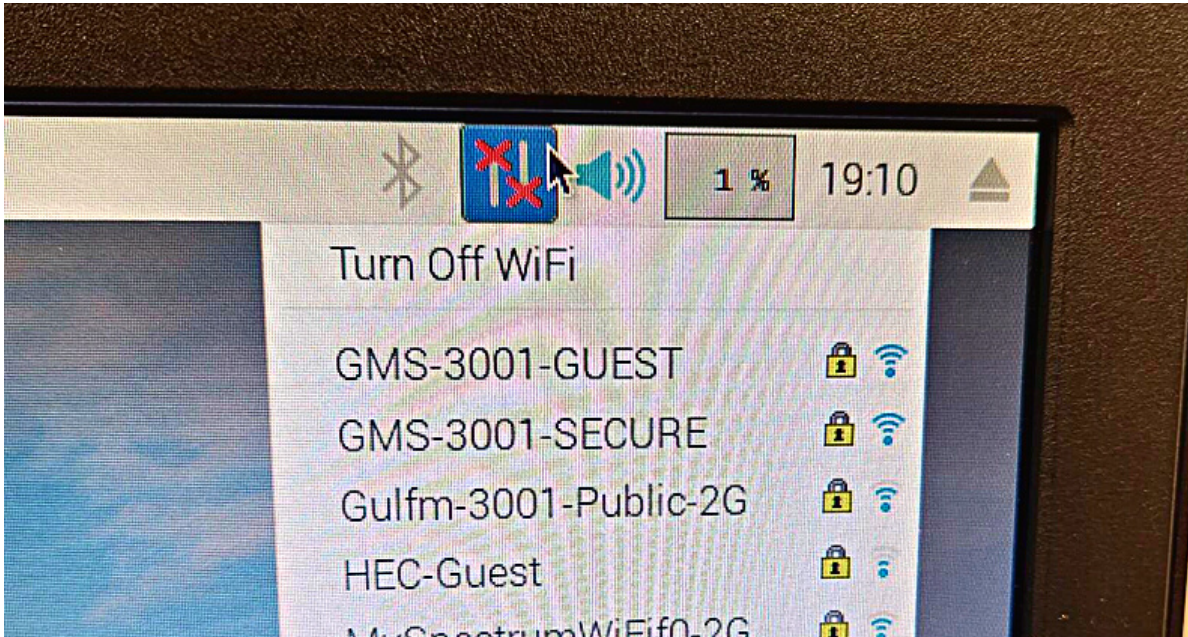

7. Click into the Text Editor to make sure it is the focus point. *(Should look like the image below)*

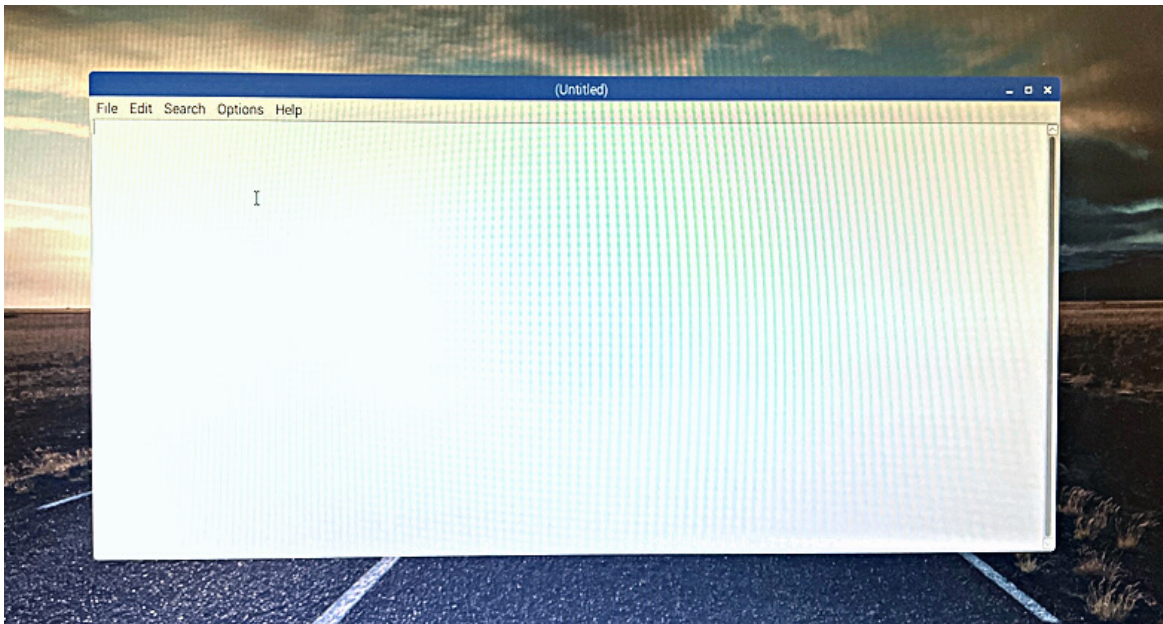

3.

HOW TO OPEN THE TEXT EDITOR

8. Scan a barcode to make sure it's working, when you scan it should print the barcode ID in the text editor box. If it prints, there move to step 9. If it doesn't, click in the box again and retry until it prints.

9. Carefully unplug the HDMI cable and USB Mouse from the DAC, **making sure you don't accidentally unplug the device.** If you must; remount the device, also be careful to not unplug the power as you will have to do this again.

10. Once the DAC is back in its original spot, feel free to scan your card as quickly as you can to try and force a double scan, if all scans successfully unlock the door, then everything should be working.

PLEASE NOTE!

You will have to re-do this setup any time you restart your DAC or it loses power. To avoid having to do this over, some gyms will purchase a small monitor to keep attached to their DAC so they can easily set this up again.

DID YOU KNOW?

If not properly protected, any
electronical device can be
renedered useless from ungrounded
outlets, electrical shorts, electrical
surges.

This includes your Door Access
Control unit!

KEEP YOUR DAC PROTECTED

Always keep your DAC plugged into a surge protector and battery backup! This will help avoid shorting the DAC due to ungrounded outlets and/or fluctuations of power!

Make sure to follow the DAC instructions for troubleshooting or contact customer service to schedule a call for trouble shooting!